


ЗАГЛУШКИ ЭЛЛИПТИЧЕСКИЕ

на P_v до 16 МПа (160 кгс/см²)

Технические условия - по ГОСТ 17380-2001

Конструкция и размеры - по ГОСТ 17379-2001

Материал - сталь 20, 09Г2С

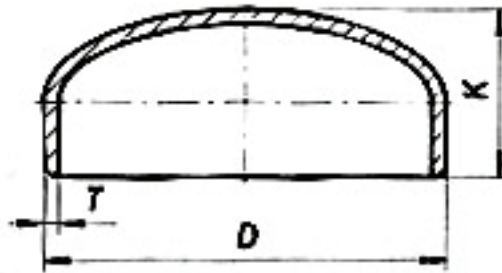

Условный проход DN, мм	Наружный диаметр D, мм	Высота заглушки K, мм	Толщина стенки T, мм	Номинальное (условное) давление PN, МПа		Масса, кг
				Ст. 20	09Г2С	
40	45	20	4,0	16	16	0,2
50	57	30	3,0	16	16	0,2
			5,0	16	16	0,3
			8,0	16	16	0,5
65	76	40	3,5	12,5	16	0,4
			6,0	16	16	0,5
80	89	45	3,5	12,5	12,5	0,6
			8,0	16	16	0,9
100	108	50	4,0	10	12,5	0,7
			8,0	16	16	1,3
	114	50	5,0	12,5	16	1,0
			8,0	16	16	1,4
125	133	55	12,0	16	16	2,1
			4,0	10	10	0,9
150	159	65	8,0	16	16	2,0
			4,5	8	10	1,5
			12,0	16	16	3,45
200	219	75	6,0	8	10	3,45
			8,0	10	12,5	4,6
			10,0	12,5	16	5,1
			12,0	16	16	6,1
250	273	85	8,0	8	10	5,6
			10,0	10	12,5	7,0
			12,0	12,5	16	9,2
			14,0	16	16	11,0
300	325	100	10,0	10	10	10,6
			12,0	10	12,5	12,7
			14,0	12,5	16	14,8
			16	16	16	16,9
350	377	115	9,0	6,3	8	15,1
			12,0	10	10	19,8
400	426	125	8,0	4	6,3	15,9
			10,0	6,3	8	19,0
			12,0	8	10	22,0
500	530	150	10,0	6,3	6,3	25,0
			12,0	6,3	8	30,0
			16,0	10	10	40,0
			18,0	10	12,5	45,0